

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 32 TOWNSHIP 15 RANGE 5

DATE: 2-25-04

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 9-12-99

IN. S.P.C. E ZONE NAD '83

NAME: 15053207

N: 493845.9880(m)

E: 70704.4630(m)

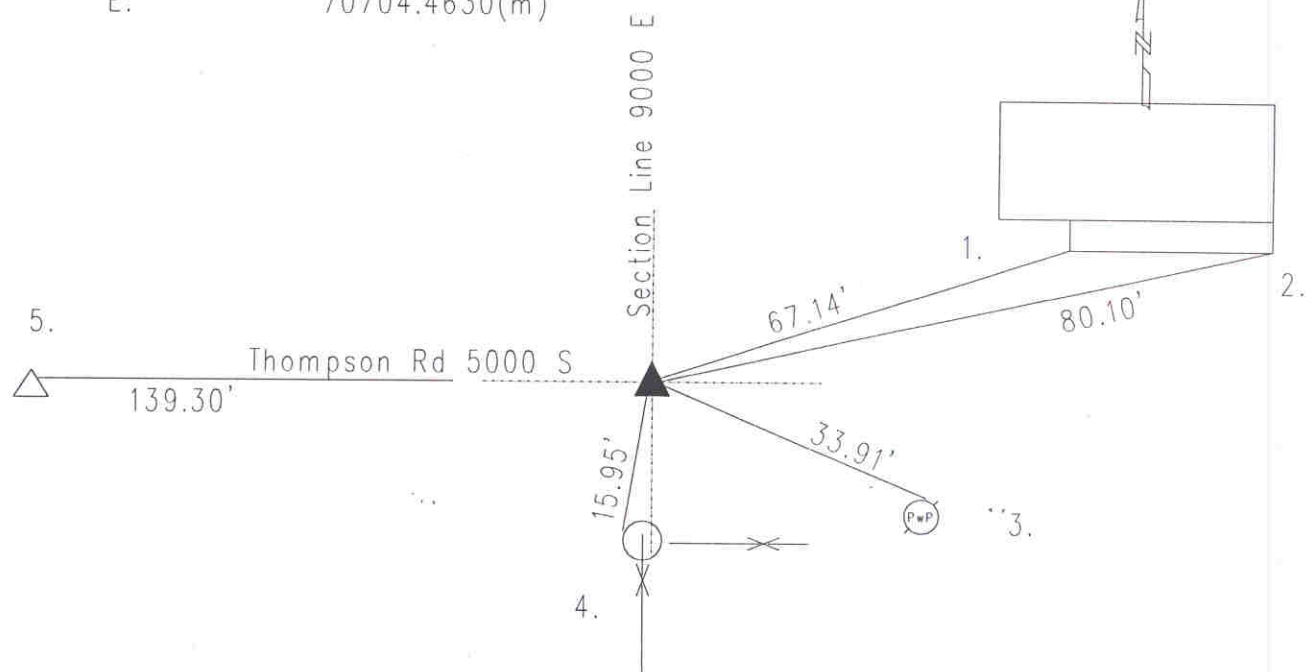

Original post set 1820 by Hendricks with witness: 8" hickory N 71 E 17 links; 6" dogwood N 75 W 12 links per Marion County Atlas pg. 14. Hosbrook 11-28 & 29-1859 called rock previously set w/witness per Franklin Township Legal Survey Book pg. 10. Schmidt 6-11-62 called railroad spike in stake. McLand 1/70 called a PK nail. Fortner 2-19-75 called the same. Cleveland 4-29-80 called the same. Greene 11-10-87 called the same. Excavated by Wilcoxon 8-16-94 and railroad spike found at surface. Dug hole 2'x2'x2' no stone found. Parts of a wooden hub found. Harrison set in place of the railroad spike. Re-tied 9-12-99 by Whiteside. Re-tied 2-25-04 by Wilcoxon.

15053207

REF.	DISTANCE	DESCRIPTION
1.	67.14'	Corner of porch foundation ADDRESS 9004
2.	80.10'	SE corner of porch "
3.	33.91'	Mag nail w/brass washer N PwP#128-711 A 15"up
4.	15.95'	Mag nail w/brass washer W corner fence post 3"up
5.	139.30'	Due W to NW corner 5-14-5 (PK nail w/washer '98)